

# ACQ/CA?

## 40-Year *Warranty!*


**EVERGRIP™ now has a 40-year warranty against failure due to corrosion – even in ACQ/CA treated lumber.**

**If corrosion ever causes EVERGRIP to fail, SFS will replace it all – the steel, the fastener, even the labor.**

**Call us for details and a copy of the warranty.\***



**Austenitic (300 Series) Stainless Steel Head and Shank**

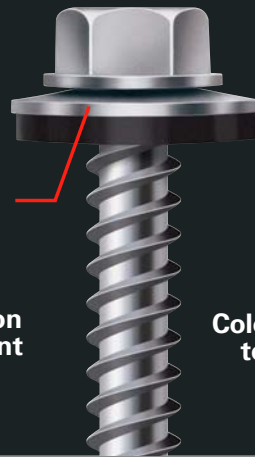


**Stainless Steel Bond Seal Washer**

**Fast-pierce Hardened Carbon Steel Sharp Point eliminates pre-drilling**

**Color Matched to any Panel**

Fastener point has been darkened in this EVERGRIP art to emphasize the hardened carbon point. You will not see a color variation on the actual fastener.

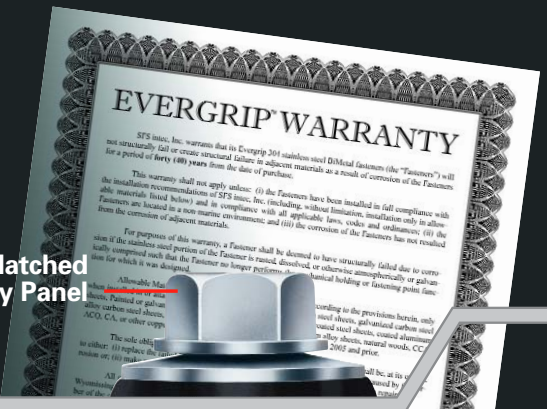

# EVERGRIP™

**304 STAINLESS STEEL BI-METAL FASTENERS**

**For more details about ACQ/CA corrosion, visit our web site at [www.sfsintecusa.com](http://www.sfsintecusa.com) or call us at 1-800-234-4533.**



AMERICAN BUILDING COMPONENTS

[www.sfsintecusa.com](http://www.sfsintecusa.com)  
SFS intec, Inc.  
Wyomissing, PA

**SFS** intec

**To make you more competitive.**

\*Certain terms apply. Call for a copy of the warranty.



**EVERGRIP stainless wood fastener is designed to self-drill metal panels:**

- Head and the majority of shank is 304 Stainless Steel, with a welded, hardened carbon steel point for self drilling performance.
- Provides the corrosion protection of stainless with the drill performance of a carbon steel fastener.
- Designed specifically for corrosion resistance in new wood treatments (ACQ/CA).

**Application**

**EVERGRIP  
9 – 15 HWH Sharp Point  
Assembled with  
stainless Bond Seal  
Metal to wood**

Self drills through the metal panel and taps into wood substrate. Min. penetration in wood substrates should be no less than 1"



1/4" Hex Washer Head  
Thread Major Dia: .181 – .175  
Thread Minor Dia: .133 – .127  
**Strength (lbs ult.):**  
Tensile: 1224  
Torsional: 50 in-lbs min.  
Shear: 980

**Performance Pounds Ultimate**

Pull-out Wood: Spruce, Pine, Fir	Pull-out Plywood	Pull-out OSB	Pull-over
<b>EVERGRIP Stainless Bond Seal</b>			
1-1/2" Penetration: 1537	3/4": 565	23/32": 261	29 ga: 378
1" Penetration: 727	5/8": 498	19/32": 276	26 ga: 519
—	1/2": 326	7/16": 223	24 ga: 704

**Notes:** Dimensions are nominal inches unless noted. Pull-out strength values may vary from tabulated loads depending upon specific wood density variations. Pull-over strength values are based on AZ55 Galvalume steel material. Ultimate values listed are the result of laboratory testing. The specific job conditions should be considered and appropriate safety factors applied.

**Selection**

Size	250/Bag	100/Box	ABC Part No.
1"	E4160-CUF	E4160-CUEG	216
1-1/2"	E4260-CUF	E4260-CUEG	217
2"	E4380-CUF	E4380-CUEG	218
2-1/2"	E4460-CUF	E4460-CUEG	219

**Options**

Painted



**Installation**

Tools: 0 – 2500 rpm screwdriver equipped with depth sensing nosepiece.



Weather Gard®  
Product Group  
**1-800-234-4533**

SFS intec, Inc.  
Spring St. & Van Reed Rd.  
P.O. Box 6326  
Wyomissing, PA 19610

**Nationwide Service Centers**

Atlanta, GA  
Durant, IA  
Houston, TX  
Reading, PA  
Sacramento, CA

© SFS intec, Inc. 2005  
0405-10K-ABC-GFY

Phone: 610-376-5751  
Fax: 610-376-8551  
[www.sfsintecusa.com](http://www.sfsintecusa.com)

**In Canada:** Toronto, Ontario Call: 905-847-5400